

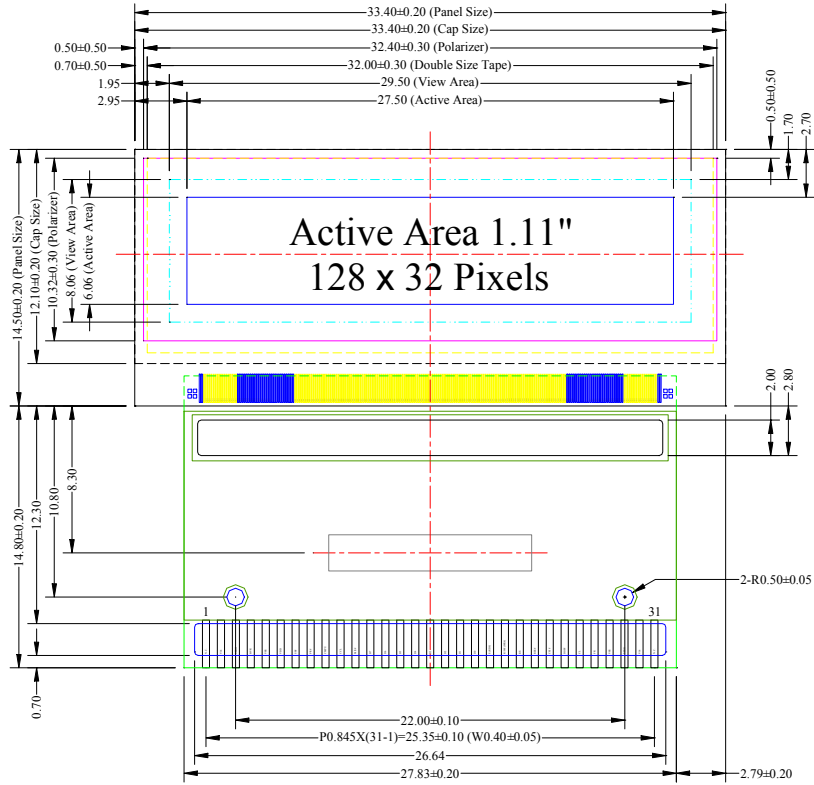

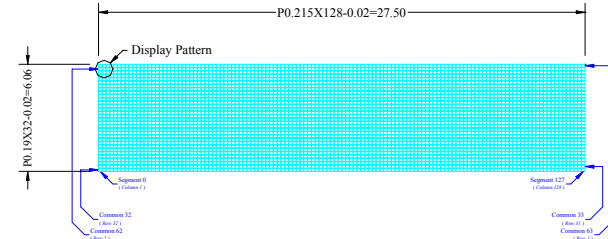


The drawing contained herein is the exclusive property of Univision. It is not allowed to copy, reproduce and or disclose in any formats without permission of Univision.



Notes:

- 1 Driver IC: PT6866
- 2 Die Size: 11476um x 2044um
- 3 TCP Number: 0466-T01
- 4 Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
- 5 General Tolerance: ±0.30
- 6 The total thickness (1.80 Max) is without polarizer protective film & double side tape. The actual assembled total thickness with above materials should be 2.20 Max.

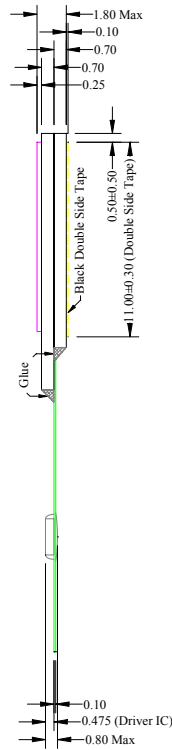

Pin	Symbol
1	N.C.
2	V16
3	SEGG
4	BVR
5	VSS
6	VDD
7	I/S#
8	P/S#
9	CMPU
10	CCL
11	M/S#
12	D7
13	D6
14	D5
15	D4
16	D3
17	D2
18	D1
19	D0
20	E (RD#)
21	R/W# (WR#)
22	RS
23	RES#
24	CS1#
25	DOF#
26	CL
27	FR
28	VSS
29	SEGG
30	V16
31	N.C.

Customer Approval Signature	Univision Technology Inc.					Drawing Number	Rev.				
						DMX2832SDT02	A				
	Title					Material					
	UG-2832GLBAT02 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, TCP Package					Soda Lime / Polyimide					
Unless Otherwise Specified		Unit	mm	Tolerance	By	Drawn	Checked	Reviewed	Scale	Sheet	Size
General Roughness											
Dimension		±0.3		Date	20041116	20041116	20041116				
Angle		±1									